






Pneumatic atomizing nozzles, Full cone, siphon principle, external mixing Series 136.3 / 166.3



Particularly fine full cone atomization with air or gas. Siphon principle. External mixing of fluids.

Applications:
Chemical industry, cooling,
atomization of viscous liquids.

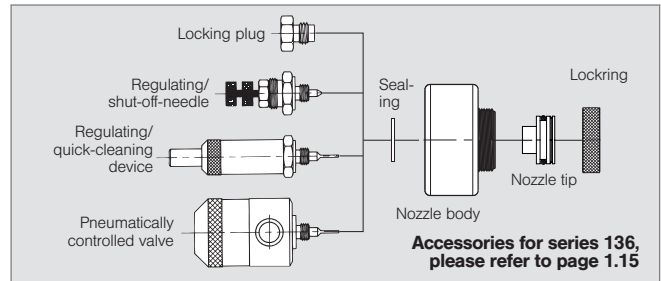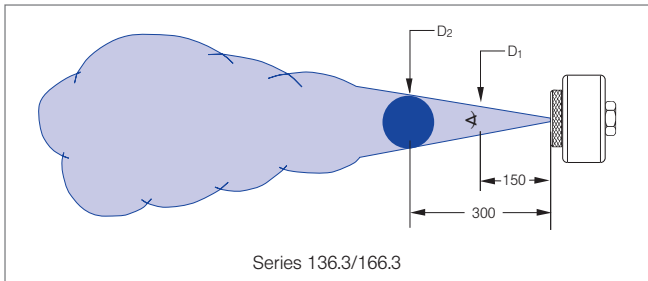

Spray angle	Ordering no.		E Ø [mm]	Air		Ḃ Water [l/h]								Spray dimensions			
	Type	Mat. no.		p [bar]	Ḃ _n [m³/h]	Water column [mm WS]			Aspiration height [mm WS]					p _{Air} [bar]	D ₁ [mm]	D ₂ [mm]	
						16	35	450	300	150	100	200	300				600
20°	136. 330. xx. 16 166. 330. xx. 16	1.4305/303 SS Brass plated	0,40	1,40	1,30	1,90	1,70	1,50	1,10	1,00	0,90	-	-	1,40	60	120	
				2,80	2,10	2,10	2,00	1,80	1,40	1,40	1,30	0,90	-	2,80	60	110	
	136. 330. xx. 14 166. 330. xx. 14	0,70	4,10	2,80	2,20	2,20	2,00	1,80	1,70	1,70	1,40	1,10	4,10	60	110		
			5,50	3,60	2,40	2,30	2,20	2,10	2,00	1,90	1,70	1,40	5,50	60	110		
			1,40	1,30	5,60	5,20	4,70	3,50	3,00	2,50	-	-	1,40	50	100		
	136. 329. xx. 14 166. 329. xx. 14	0,70	2,80	2,10	6,50	6,00	5,50	4,50	4,00	3,50	2,00	0,70	2,80	50	110		
			4,10	2,90	7,20	6,70	6,30	5,10	4,60	4,20	3,00	1,90	4,10	50	110		
			5,50	3,80	7,10	6,70	6,30	5,70	5,40	5,10	4,30	3,00	5,50	50	110		
	136. 328. xx. 13 166. 328. xx. 13	1,00	1,40	1,90	5,30	4,90	4,40	3,60	3,20	2,60	1,20	0,50	1,40	70	130		
			2,80	3,10	5,30	4,90	4,50	3,80	3,40	1,80	0,90	0,40	2,80	60	120		
			4,10	4,20	4,60	4,30	3,90	1,00	0,90	0,80	0,50	-	4,10	60	130		
	136. 327. xx. 12 166. 327. xx. 12	1,50	5,50	5,40	3,40	0,90	0,60	-	-	-	-	-	-	5,50	110	110	
			1,40	2,00	8,90	8,00	7,20	5,50	4,10	3,10	1,30	-	1,40	50	110		
			2,80	3,20	9,70	9,00	8,20	6,50	5,60	4,70	2,70	1,70	2,80	50	100		
	136. 326. xx. 11 166. 326. xx. 11	2,50	4,10	4,30	9,80	9,00	8,40	6,70	5,90	4,90	2,80	1,70	4,10	60	110		
			5,50	5,50	9,90	9,10	8,50	7,10	6,20	5,10	2,80	1,80	5,50	50	100		
			1,40	3,60	19,30	17,40	15,30	11,80	10,30	8,30	0,40	-	1,40	50	90		
					2,80	5,90	16,80	14,80	12,30	8,70	3,60	1,10	-	-	2,80	50	100
					4,10	7,80	12,90	10,50	7,80	2,00	1,50	-	-	-	4,10	50	100
					5,50	10,00	6,60	3,60	-	-	-	-	-	-	5,50	50	90
					1,40	6,20	43,70	38,00	31,70	21,20	18,30	16,00	-	-	1,40	50	110
					2,80	9,90	24,20	19,50	15,60	4,50	-	-	-	-	2,80	50	110

E = narrowest free cross section (water)

Operational information:

Liquid flow of pneumatic atomizing nozzles with external mixing can be turned down to 0 with air pressure remaining constant.

Example for ordering: Type 136. 330. xx. 16 + Material no. (xx) 16 = Ordering no. 136. 330. 16. 16

