



# Axial-flow full cone nozzles


## Series 460 / 461



**Very uniform spray pattern.  
Large free cross-sections,  
due to optimized  
x-style swirl insert.**

Applications:

Cleaning and washing process, cooling of gaseous fluids and solids, surface spraying, spraying onto mats in air washers, improving of chemical reactions. Large free cross-sections, due to optimized x-style swirl insert.

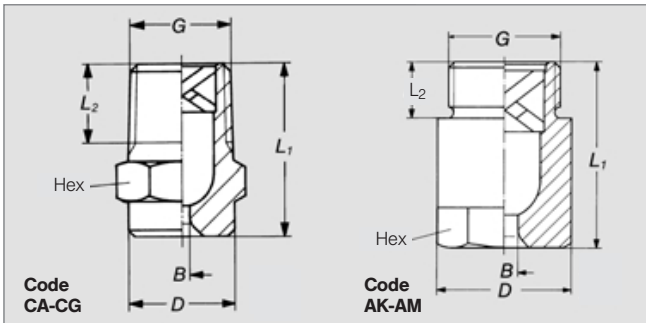

Code	G	Dimensions [mm]			Hex	Weight Brass
		L <sub>1</sub>	L <sub>2</sub>	D		
<b>CA</b>	1/8 BSPT	18,0	6,5	10,0	11	15 g
<b>CC</b>	1/4 BSPT	22,0	10,0	13,0	14	17 g
<b>CE</b>	3/8 BSPT	24,5	10,0	16,0	17	30 g
CE	1/8 BSPT	30,0	10,0	16,0	17	50 g
<b>CG</b>	1/2 BSPT	32,5	13,0	21,0	22	67 g
CG	1/2 BSPT	43,5	13,0	21,0	22	85 g
<b>AK</b>	3/4 BSPP	42,0	15,0	32,0	27	170 g
AK	3/4 BSPP	50,0	15,0	32,0	27	200 g
<b>AM</b>	1 BSPP	56,0	17,0	40,0	36	360 g

Subject to technical modifications.

Spray angle	Ordering no.								B Ø [mm]	E Ø [mm]	ṽ [l/min]							Spray diameter D at p=2 bar  H = 200 mm H = 500 mm			
	Type	Material-no.			Code						p [bar]										
		17 1.4571/316SS	30 Brass	5E PVDF	1/6 BSPT	1/4 BSPT	3/8 BSPT	1/2 BSPT			3/4 BSPP	1 BSPP	0,5	1,0	2,0	3,0	5,0		10,0		
45°	460.403	○	○	-	CA	-	-	-	-	-	1,20	0,85	0,57	0,76	1,00	0,30	1,18	1,44	1,90	160	400
	460.523	○	○	-	CA	-	-	-	-	-	1,50	1,35	1,15	1,52	2,00	0,60	2,35	2,89	3,81	160	400
	460.603	○	○	-	-	CC	CE	-	-	-	1,90	1,80	1,81	2,39	3,15	0,95	3,70	4,54	6,00	160	400
	460.643	○	○	-	-	CC	CE	-	-	-	2,15	2,00	2,30	3,03	4,00	1,20	4,70	5,77	7,61	160	400
	460.683	-	○	-	-	CC	CE	-	-	-	2,40	2,00	2,87	3,79	5,00	1,50	5,88	7,21	9,52	160	400
	460.703	-	○	-	-	-	CE	-	-	-	2,55	2,20	3,22	4,24	5,60	1,68	6,59	8,08	10,66	160	400
	460.723	○	○	-	-	-	CE	CG	-	-	2,70	2,35	3,62	4,77	6,30	1,89	7,41	9,09	11,99	160	400
	460.783	-	○	-	-	-	-	CG	-	-	3,20	3,20	5,17	6,82	9,00	2,70	10,58	12,98	17,12	160	400
	460.843	-	○	-	-	-	-	CG	-	-	3,80	3,70	7,18	9,47	12,50	3,75	14,70	18,03	23,80	160	400
60°	460.404	○	○	-	CA	-	-	-	-	-	1,20	0,85	0,57	0,76	1,00	0,30	1,18	1,44	1,90	220	560
	460.444	○	-	-	CA	-	-	-	-	-	1,30	1,05	0,72	0,95	1,25	0,38	1,47	1,80	2,38	220	560
	460.484	○	○	-	CA	-	-	-	-	-	1,45	1,15	0,92	1,21	1,60	0,48	1,88	2,31	3,05	220	560
	460.524	○	○	-	CA	-	-	-	-	-	1,60	1,20	1,15	1,52	2,00	0,60	2,35	2,89	3,81	220	560
	460.604	○	○	-	CA	-	CE	-	-	-	2,05	1,40	1,81	2,39	3,15	0,95	3,70	4,54	6,00	220	560
	460.644	○	○	○	-	CC	CE	-	-	-	2,40	1,90	2,30	3,03	4,00	1,20	4,70	5,77	7,61	220	560
	460.684	○	○	-	-	CC	CE	-	-	-	2,60	2,00	2,87	3,79	5,00	1,50	5,88	7,21	9,52	220	560
	460.724	○	○	-	-	CC	CE	-	-	-	2,90	2,00	3,62	4,77	6,30	1,89	7,41	9,09	11,99	220	560
	460.764	○	○	-	-	-	CE	-	-	-	3,25	2,85	4,59	6,06	8,00	2,40	9,41	11,54	15,22	220	560
	460.804	○	○	-	-	-	CE	-	-	-	3,60	2,95	5,74	7,58	10,00	3,00	11,76	14,43	19,04	220	560
	460.844	○	○	-	-	-	-	CG	-	-	4,00	3,30	7,18	9,47	12,50	3,75	14,70	18,03	23,80	220	560
	460.884	○	○	-	-	-	-	CG	-	-	4,50	3,70	9,19	12,13	16,00	4,80	18,82	23,08	30,46	220	560
	460.924	○	○	-	-	-	-	-	AK	-	5,20	4,50	11,49	15,16	20,00	6,01	23,52	28,85	38,07	220	560
	460.964	○	○	○	-	-	-	-	AK	-	5,80	4,90	14,36	18,95	25,00	7,51	29,40	36,07	47,59	220	560
	461.044	○	○	-	-	-	-	-	-	AM	7,20	5,40	22,97	30,31	40,00	12,01	47,04	57,71	76,15	220	560
	461.084	○	○	-	-	-	-	-	AM	8,60	6,50	28,72	37,89	50,00	15,02	58,80	72,14	95,18	220	560	

B = bore diameter · E = narrow free cross section

Continued on next page.

Conversion formula for the above series:  $\dot{V}_2 = \dot{V}_1 * \left(\frac{p_2}{p_1}\right)^{0,4}$   
(≤ 10 bar)

